


# More convenient, better, safe!

## Protection of the drinking water installation with SYR's FillingCombi CA 6828.

Pressure gauge on the top for easy reading

2 Shut-off valves

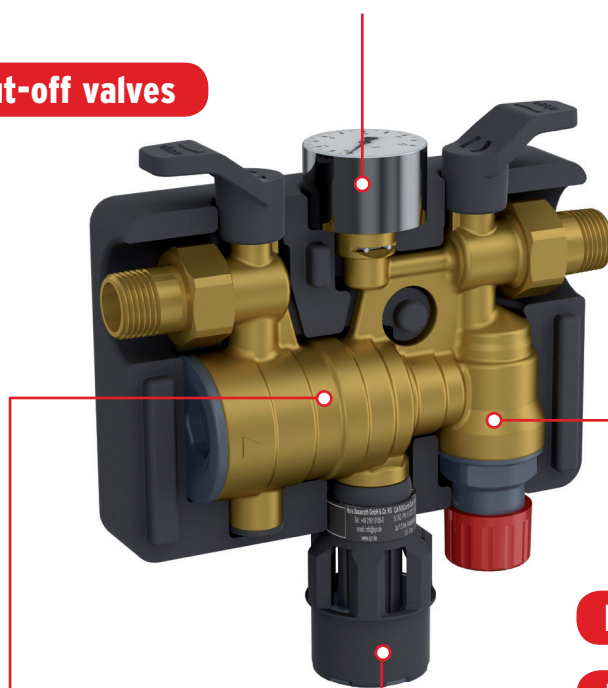

CA backflow preventer

Pressure reducing valve

Drain connection

### FillingCombi CA 6828

- Protects potable water against non-potable water up to and including fluid category 3
- For automatic filling of unvented heating systems with non-conditioned heating water
- Shut-off valves at the inlet and outlet (ball valves)
- CA backflow preventer according to EN 1717
- Adjustable pressure reducing valve
- Pressure gauge
- Insulating cover



#### Technical specifications

Max. operating pressure	10 bar
Max. operating temperature	30 °C (inlet) / 65 °C (outlet)
Fluid	Potable water
Filling capacity	1.3 m³/h at Δp 1.5 bar
Outlet pressure - pressure reducing valve	1.5 – 5 bar (factory set to 1.5 bar)
Mounting position	Horizontal, tundish connection pointing downwards
Connection size	DN 15
Serial number	6828.15.005



**Innovative solutions for smart people**