


One installation, three functions: TRIO DFR/LS Connect

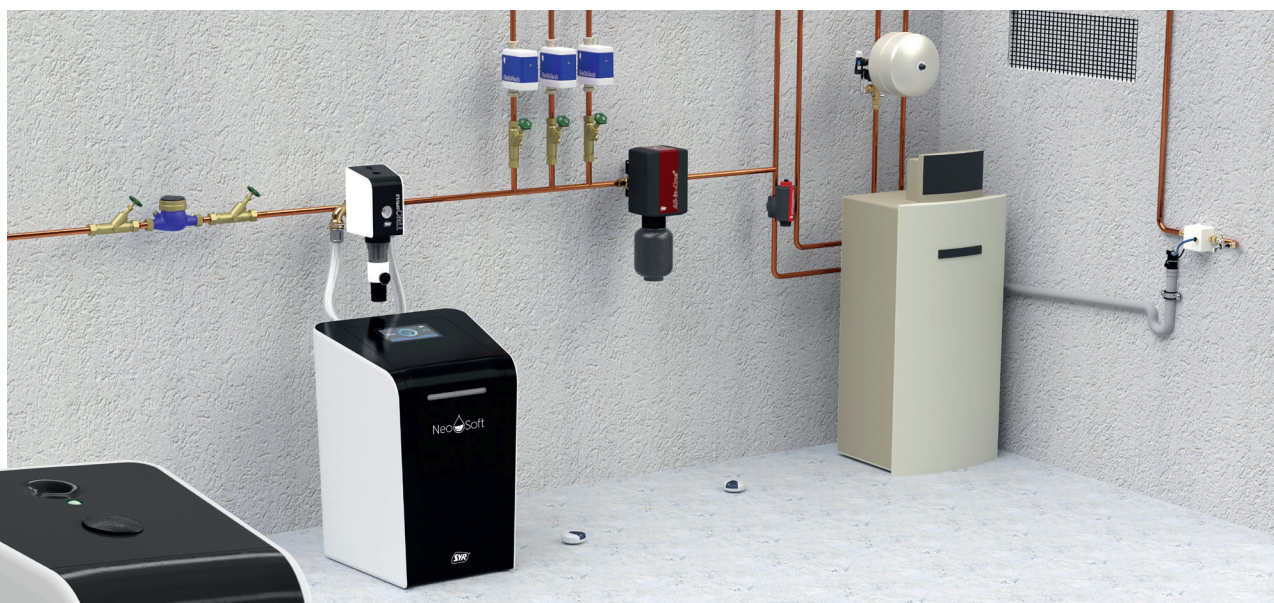

Drinking water is our most precious commodity. It is therefore of utmost importance to use products that help save water and ensure its quality. TRIO DFR/LS Connect – the innovative combination of semi-automatic backwash filter, pressure reducing valve and leakage protection.

Backwash filter

- reliably filters impurities from drinking water
- highly efficient backwash system

Pressure reducing valve

- helps save water (without loss of comfort)
- reliably regulates the water pressure

Leakage protection

- continuously monitors the installation
- reliably protects against expensive water damage and waste of water
- detects microleakage
- self-learning phase

Connect function

- Wi-Fi network/LAN enabled
- control/monitoring via SYR App
- notifications via push message and/or email
- connectable to NeoSoft Connect water softener and SafeFloor Connect floor sensors

Connection

- fits on SYR flange system (DN 20 to 32) and sandwich flange of NeoSoft Connect

Technical specifications

Max. operating pressure	16 bar
Max. operating temperature	30 °C
Fluid	potable water
Starting value	3 litre/h
Flow rate	(according to DIN EN 1567)
DN 20	2.3 m ³ /h at Δp 1,1 bar
DN 25	3.6 m ³ /h at Δp 1,1 bar
DN 32	3.6 m ³ /h at Δp 1,1 bar
Protection class	IPX3
Order-No.	2425.00.000