


# The new compact class for the protection against water damage: SYR SafeTech Connect. Stylish, reliable, high flow rate.



Status display

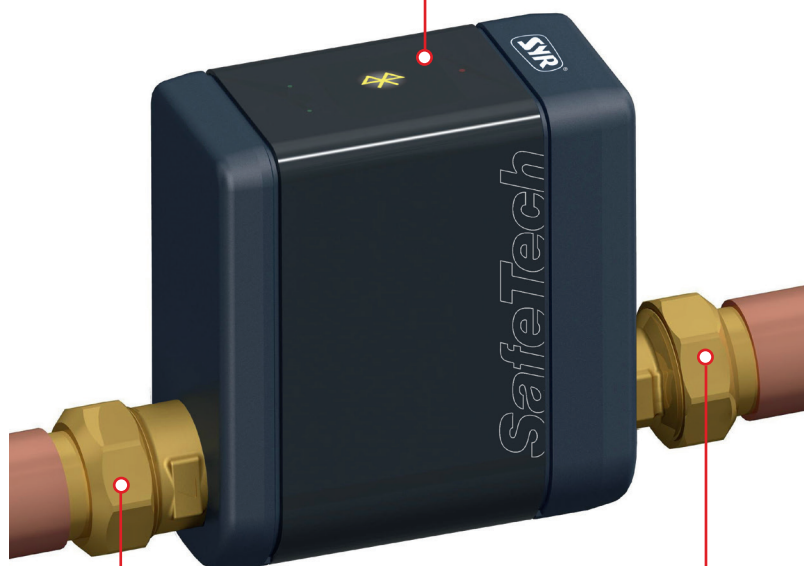

To be mounted in a pipework



WiFi

## SYR SafeTech Connect Leakage Detector

- offers reliable protection against water damage and waste of water
- intensified monitoring with the special absence function
- controllable in the WiFi network via the SYR App with smartphone or tablet
- emergency unlocking function easily controllable via the status display
- optional radio-controlled and battery-powered floor sensor

### Technical specifications

min. service pressure		2 bar
mmax. service pressure		16 bar
max. service temperature		30 °C
Medium		Potable water
flow rate	DN 20	7,3 m <sup>3</sup> /h at Δp 1,0 bar
	DN 25	7,8 m <sup>3</sup> /h at Δp 1,0 bar
	DN 32	8,0 m <sup>3</sup> /h at Δp 1,0 bar
voltage power supply adapter		9V DC
batteries		4 x LR 03
max. load external potential-free contact (OUT)		24V / 2A
serial number	DN 20	2422.20.000
	DN 25	2422.25.000
	DN 32	2422.32.000



Innovative solutions for clever people